

3.3KW Li-ION OBC WITH CAN BUS COMMUNICATION



| | | | | | |
|--------------|-----------------------|-------|-------|------------|--------------------------|
| Item: | HGCH-360M 3.3KW | Rev.: | Name: | Date: | Remark: |
| Part No: | 34-115-1ZZZ | 01 | SH | 20.02.2019 | Charge indication |
| Date: | 05.12.2018 | 02 | SH | 08.04.2019 | Resistance,CAN,LVD, MTBF |
| Originator: | HS | 03 | SH | 10.09.2019 | Input, CAN |
| Description: | Preliminary Datasheet | | | | |

Content


| | |
|---|---|
| 1. Input characteristics..... | 3 |
| 2. Flowchart..... | 3 |
| 3. Charging output characteristics..... | 4 |
| 4. Auxiliary power supply | 4 |
| 5. CAN communication..... | 4 |
| 6. Protection | 5 |
| 7. Indication | 5 |
| 8. Working conditions..... | 5 |
| 9. Safety and reliability..... | 6 |
| 10. Dimension & weight | 7 |
| 11. Drawing..... | 7 |

| | | | | | |
|--------------|-----------------------|-------|-------|------------|--------------------------|
| Item: | HGCH-360M 3.3KW | Rev.: | Name: | Date: | Remark: |
| Part No: | 34-115-1ZZZ | 01 | SH | 20.02.2019 | Charge indication |
| Date: | 05.12.2018 | 02 | SH | 08.04.2019 | Resistance,CAN,LVD, MTBF |
| Originator: | HS | 03 | SH | 10.09.2019 | Input, CAN |
| Description: | Preliminary Datasheet | | | | |

1. Input characteristics

| | |
|----------------------|--|
| Input voltage range: | 120V - 240V AC Rated voltage: 230V AC |
| Input current: | ≤16A (the power supply automatically reduces the output current when input is equal to 16A or greater) |
| Power input rate: | ≤3.3KW (the power supply automatically reduces the output power at low input voltage) |
| Power factor: | rated input, PF >0.99 at 50-100% load |
| Input frequency: | 47...63Hz |
| Protection: | Low voltage protection and high voltage protection switch off. Restart at specified conditions. |


2. Flowchart

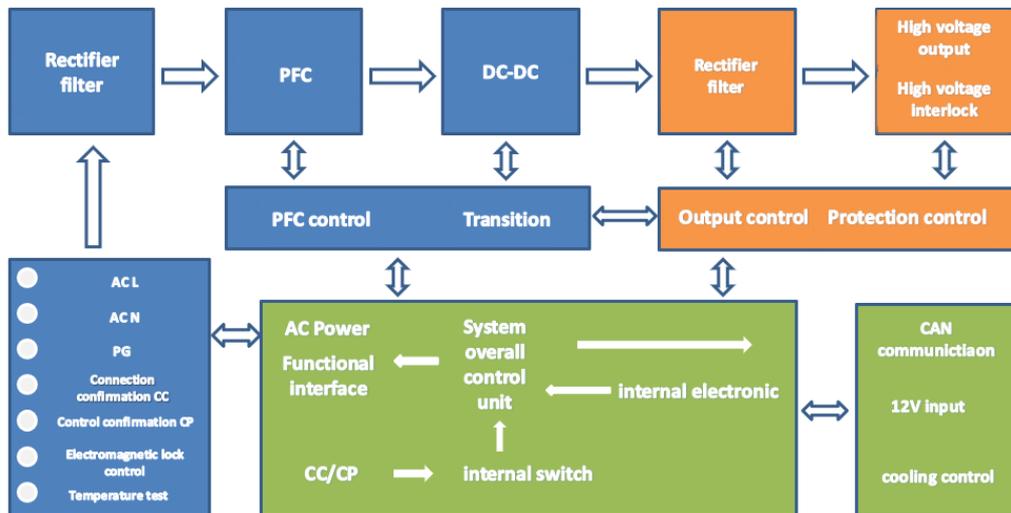

| | | | | | |
|--------------|-----------------------|-------|-------|------------|----------------------------|
| Item: | HGCH-360M 3.3KW | Rev.: | Name: | Date: | Remark: |
| Part No: | 34-115-1ZZZ | 01 | SH | 20.02.2019 | Charge indication |
| Date: | 05.12.2018 | 02 | SH | 08.04.2019 | Resistance, CAN, LVD, MTBF |
| Originator: | HS | 03 | SH | 10.09.2019 | Input, CAN |
| Description: | Preliminary Datasheet | | | | |

3. Charging output characteristics

Output voltage: 240V-430V DC, rated voltage 360V DC
 Output current: 0-10A rated current 9A
 Load effect: $\leq \pm 0.5\%$ (10%-100% of the rated load)
 Source effect: $\leq \pm 0.5\%$ (10%-100% of the rated load)
 Voltage accuracy: $\leq \pm 1V$
 Temp. coefficient: $\leq \pm 0.02\%$ (°C)
 Output ripple: $\leq \pm 3\%$ (effective value)

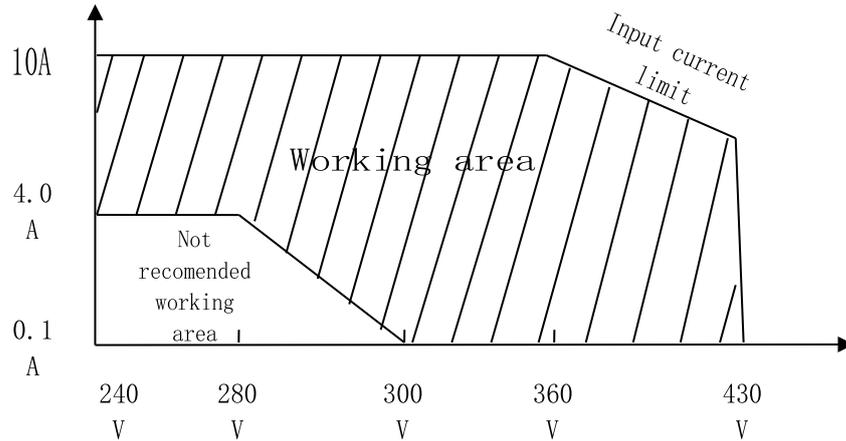

4. Auxiliary power supply

Output voltage: 13.5V DC $\pm 0.5V$
 Output current: 2.5A
 Output ripple: $\leq 1.5\%$ (effective value)
 Voltage accuracy: $\leq \pm 1\%$

5. CAN communication

CAN communication protocol: J1939 CAN open
 CAN communication baud rate: 250kBps or 500kBps (can be changed)

| | | | | | |
|--------------|-----------------------|-------|-------|------------|----------------------------|
| Item: | HGCH-360M 3.3KW | Rev.: | Name: | Date: | Remark: |
| Part No: | 34-115-1ZZZ | 01 | SH | 20.02.2019 | Charge indication |
| Date: | 05.12.2018 | 02 | SH | 08.04.2019 | Resistance, CAN, LVD, MTBF |
| Originator: | HS | 03 | SH | 10.09.2019 | Input, CAN |
| Description: | Preliminary Datasheet | | | | |

6. Protection

Output voltage: Working range is 240-430V DC. If the voltage is out of the range the power supply switches off. Restart of the power supply when voltage is in the working range.

Output current: limited at 10A ±1A

Output short circuit: In case of short circuit on output, device switches off by Automatic protection. Automatic restart after clearance of short circuit

Revers polarity protection: Switch off or no start in case of polarity inverse of output. Error Signal indicated by LED.

Temperature protection: At internal temperature of 95°C the output power is reduced. At 105°C internal temperature the power supply switches off. When temperature drops down charger restart automatically.

7. Indication

Green LED:

- Flashing - Standby
- ON - Charge
- OFF - Ready

8. Working conditions

Working temperature: -40 °C - +85 °C

Storage temperature: -40 °C - +95 °C

Relative humidity: 5% - 95% (non-condensation)

MTBF: min. 50,000 hours at ambient temperature 25°C

Altitude: <5000m

Cooling: Convection cooling
at internal temperature of 60°C the external fan starts.

| | | | | | |
|--------------|-----------------------|-------|-------|------------|--------------------------|
| Item: | HGCH-360M 3.3KW | Rev.: | Name: | Date: | Remark: |
| Part No: | 34-115-1ZZZ | 01 | SH | 20.02.2019 | Charge indication |
| Date: | 05.12.2018 | 02 | SH | 08.04.2019 | Resistance,CAN,LVD, MTBF |
| Originator: | HS | 03 | SH | 10.09.2019 | Input, CAN |
| Description: | Preliminary Datasheet | | | | |

9. Safety and reliability


| | |
|------------------------|---|
| LVD: | Compliant to IEC/UL 60950 |
| EMC: | EN 55011:2016/A1:2017, EN 55014-1:2017, EN 55014-2:2015, EN 61000-3-2:2014, EN 61000-3-3:2013 |
| Ground protection: | Impedance housing to ground $\leq 0.1\Omega$. |
| Electric strength: | |
| Input to output: | 2500Vac/10mA/60s |
| Input to the ground: | 2000Vac/10mA/60s |
| Output to ground: | 2000Vac/10mA/60s |
| Insulation resistance: | Input, high output, low voltage power supply and ground (PE) insulation resistance is higher than 20m Ω (1000 VDC). Input, high output, low voltage power supply insulation resistance between each other is higher than 20m Ω (1000 VDC). |
| Leakage current: | less than 3.5mA at 264V input |
| Surge and ESD: | Input 2.5KV 4KV lightning surge test All metal parts and electrical interfaces withstand contact discharge of 4KV and air discharge of 8KV. |
| Protection level: | IP67 |
| Impact resistance: | The on-board charger in the non-working state is subjected to half-sine pulse with peak acceleration 500m/s and the nominal pulse duration of 18ms. After the test, its performance does not decrease and the active parts does not come into contact with the housing due to permanent or temporary deformation. |

| | | | | | |
|--------------|-----------------------|-------|-------|------------|----------------------------|
| Item: | HGCH-360M 3.3KW | Rev.: | Name: | Date: | Remark: |
| Part No: | 34-115-1ZZZ | 01 | SH | 20.02.2019 | Charge indication |
| Date: | 05.12.2018 | 02 | SH | 08.04.2019 | Resistance, CAN, LVD, MTBF |
| Originator: | HS | 03 | SH | 10.09.2019 | Input, CAN |
| Description: | Preliminary Datasheet | | | | |

10. Dimension & weight

Dimension: 296x150x100mm
 Weight: 4.2Kg + / - 0.5Kg

11. Drawing

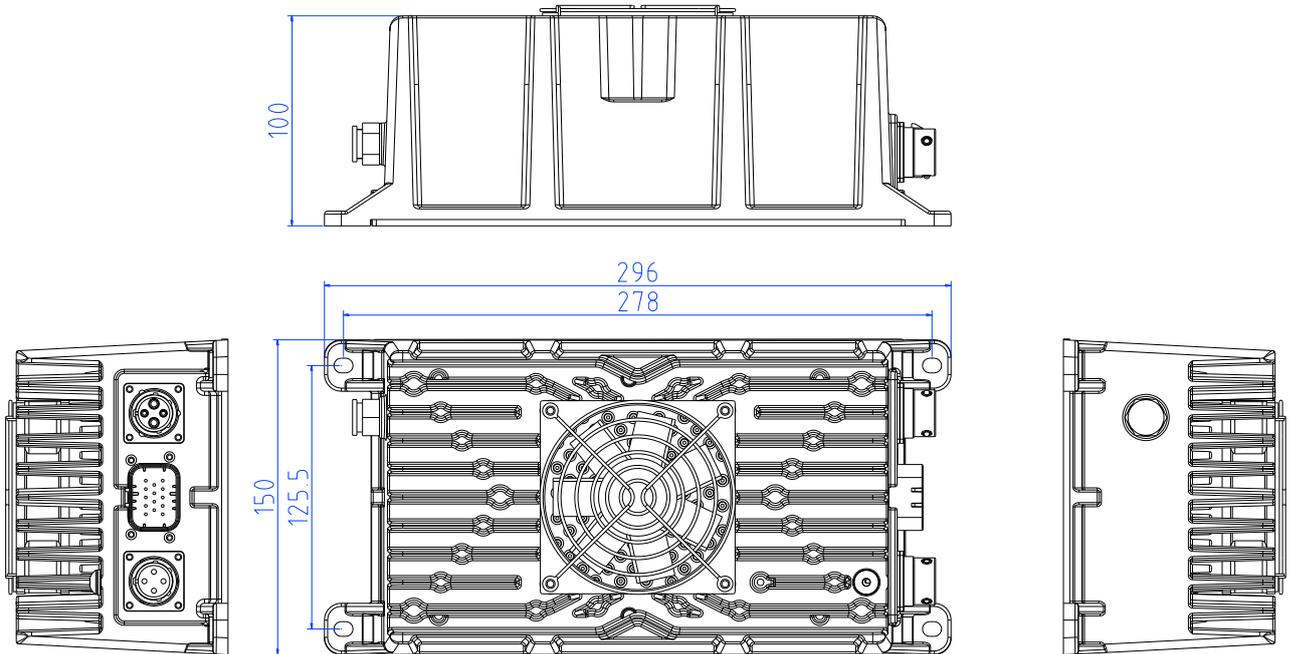

HGPower GmbH
 Kurpfalzstr. 28
 97944 Boxberg – Germany

Tel.: +49 7930 9936 220
 Fax: +49 7930 9936 221
 Mail: info@hgpower.de
 Web: www.hgpower.de

| | | | | | |
|--------------|-----------------------|-------|-------|------------|--------------------------|
| Item: | HGCH-360M 3.3KW | Rev.: | Name: | Date: | Remark: |
| Part No: | 34-115-1ZZZ | 01 | SH | 20.02.2019 | Charge indication |
| Date: | 05.12.2018 | 02 | SH | 08.04.2019 | Resistance,CAN,LVD, MTBF |
| Originator: | HS | 03 | SH | 10.09.2019 | Input, CAN |
| Description: | Preliminary Datasheet | | | | |